




84' BETWEEN CURBS - 10" CROWN

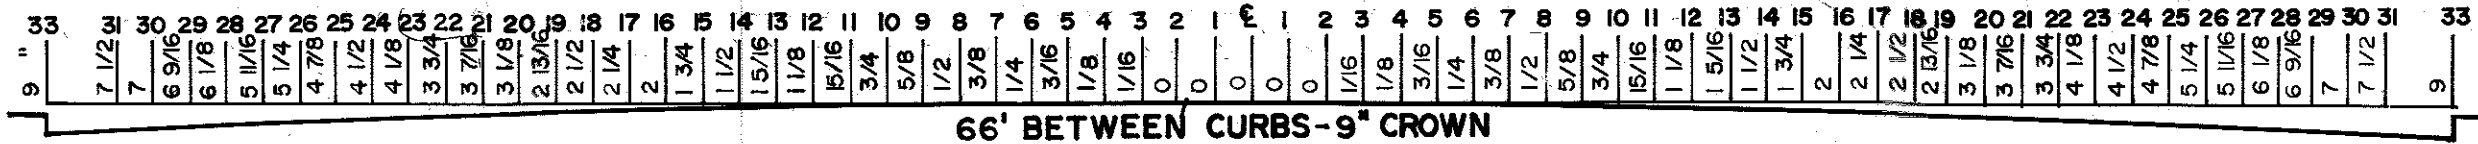


66' BETWEEN CURBS - 9" CROWN

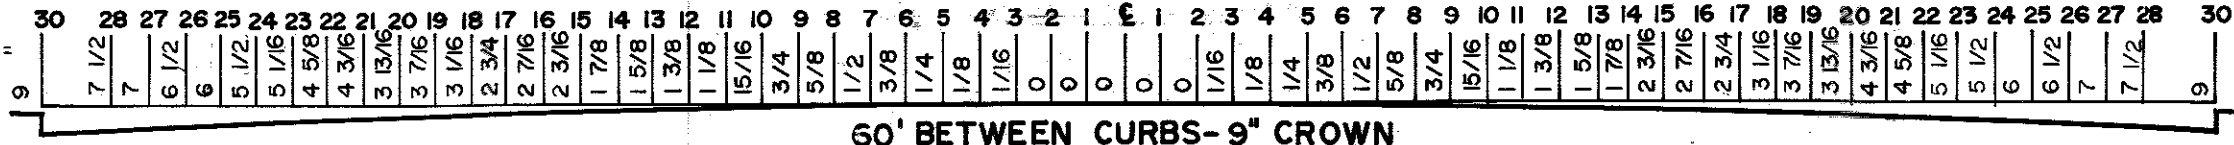


60' BETWEEN CURBS - 9" CROWN

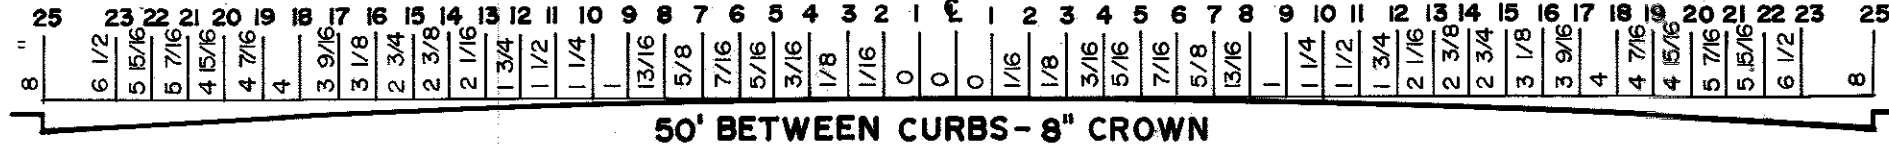


50' BETWEEN CURBS - 8" CROWN

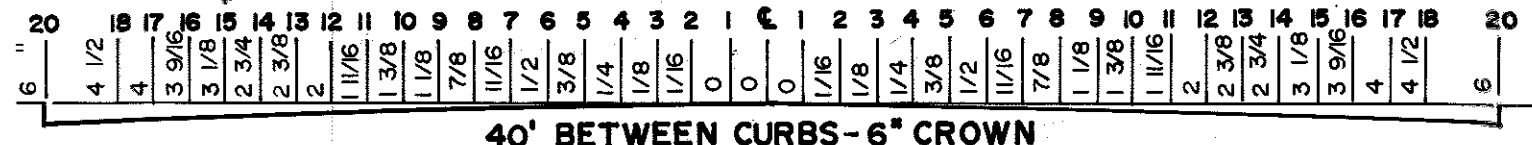

40' BETWEEN CURBS - 6" CROWN

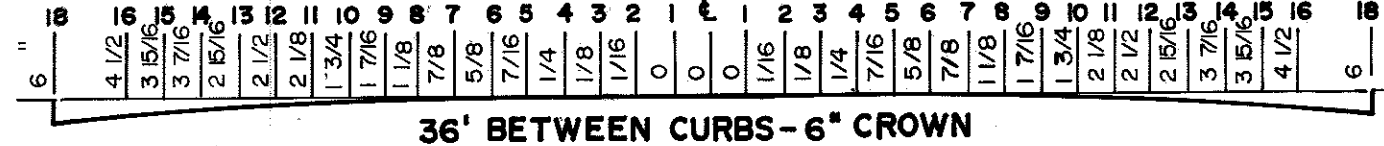

36' BETWEEN CURBS - 6" CROWN

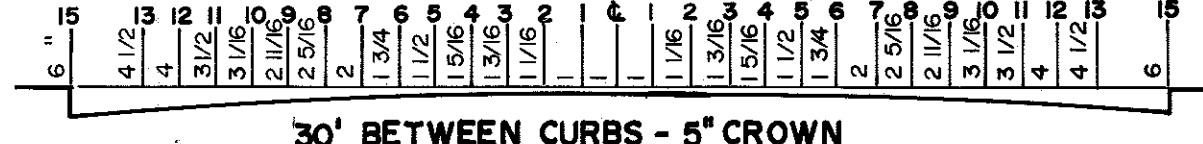

30' BETWEEN CURBS - 5" CROWN

REVISIONS			
NO.	DATE	BY	REMARKS
1	5-30-85	L.R.H.	REMOVED DIV. OF PUBLIC WORKS (T.BLK.)
2	2-29-88	D.H.G.	REMOVED DEPARTMENT (T.BLK.)

CONVERSIONS	
ENGLISH	METRIC

NOTES: ALL GUTTERS ARE 6" HIGH.
 ALL GUTTERS ARE STRAIGHT SURFACES.
 A 1" BLOCK ON CURB IS REQUIRED FOR 7" CROWNS.
 A 2" BLOCK " " " " FOR 8" CROWNS.
 A 3" BLOCK " " " " FOR 9" CROWNS.

CITY OF MEMPHIS
DIVISION OF ENGINEERING

DESIGN STANDARD
FOR
PARABOLIC CROWNS for
STREETS

Foy E. Read

DER. CITY ENGINEER

10/31/78

DATE

STANDARD CITY OF MEMPHIS PARABOLIC CROWNS FOR VARIOUS CURB WIDTHS

Foy E. Read

DWG. NO. 31