BUREAU, J.G. JAMES JR. BUREAU ENGINEER. F. READ DRAFTSMAN. d.b. DATE. 5-16-77 SCALE N/T/S

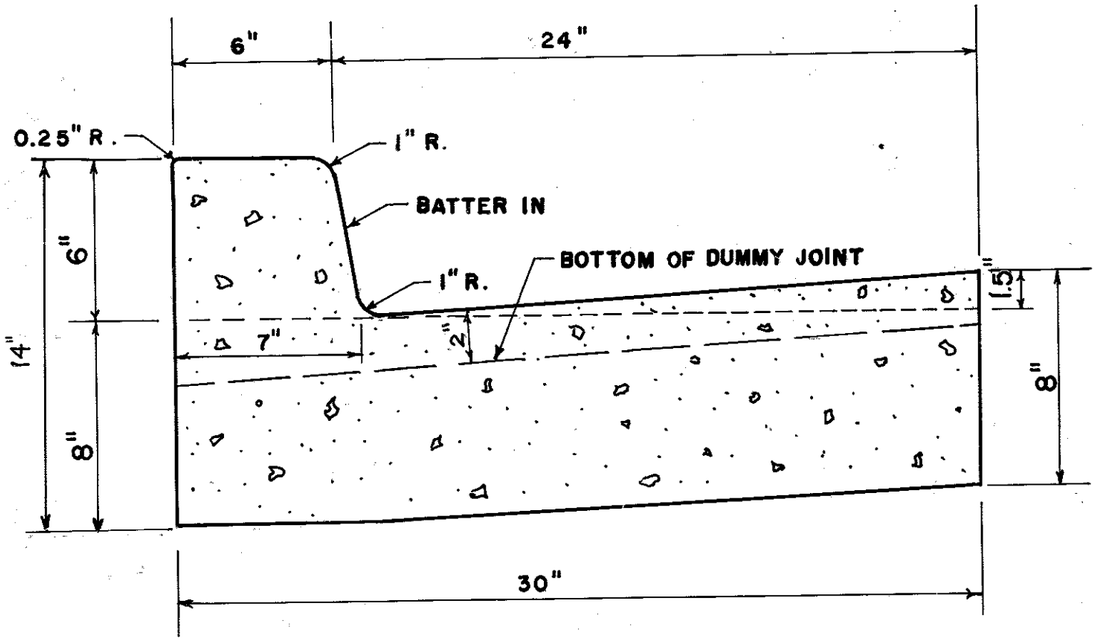

NOTE: Conc. to be CLASS 'A' (6 bag min)

REVISIONS			
NO.	DATE	BY	REMARKS
1	5/21/79	E.W.F.	STD. CONST. PRACTICES
2	3-26-85	J.M.B.	REMOVED DIV. OF PUBLIC WORKS(T. BLK.)
3	7-8-87	D.H.G.	REPLACE 3000 PSI WITH CLASS 'A'
4	1-29-88	D.H.G.	REMOVED DEPARTMENT (T. BLK.)

CONVERSIONS	
ENGLISH	METRIC

NOTES:
1. Pre-cut exp. joint's material shall be used in all exp. joints.
2. Dummy joints shall be installed at 10ft. intervals, maximum.
3. Exp. joints shall be installed at 40ft., maximum.
4. Exp. joints shall be installed at ends of radius.
5. Exp. joints shall be located a minimum of 5ft. from inlet structures.

CITY OF MEMPHIS
DIVISION OF ENGINEERING

DESIGN STANDARD
FOR
6-30 CURB & GUTTER

J. T. Janney — DEP. CITY ENGINEER
10-31-78 — DATE

DWG. NO. 2

JC5756